


M26T Track 48V

TRIMLESS MOUNTING
















CLASE III MUY BAJA TENSION DE SEGURIDAD
 CLASS III VERY LOW SAFETY VOLTAGE
 CLASSE III TRÈS BASSE TENSION
 KLASSE III NIEDRIG-SICHERHEITSSSTROM
 CLASSE III MOLTO BASSA TENSIONE DI SICUREZZA
 KLASSE III ERG LAAG VEILIGHEIDSVOLTAGE
 ΤΑΞΗ ΙΙΙ ΠΟΛΥ ΧΑΜΗΛΗ ΕΝΤΑΣΗ ΑΣΦΑΛΕΙΑΣ
 فئيه III فولتاآ امان منخفظ
 APTO PARA USO INTERIOR
 SUITABLE FOR INDOOR USE
 APPROPRIÉ POUR UTILISATION INTÉRIEURE
 FÜR INNENGEBRAUCH GEEIGNET
 ADATTO PER USO INTERNO
 ΤΟΕΡΑΣΒΑΑΡ ΒΙΝΝΕΝSHUIS
 ΚΑΤΑΛΗΛΟ ΓΙΑ ΕΣΩΤΕΡΙΚΕ ΧΡΗΣΗ
 مناسبة للاستعمال الداخلي

ACORDE A LAS NORMAS EN 60.598
 IN AGREEMENT TO THE NORM EN 60.598
 CONFORME AUX NORMES EN 60.598
 GEMÄSS DER NORMEN EN 60.598
 CONFORME ALLE NORME EN 60.598
 IN OVEREENSTEMMING MET DE NORM EN 60.598
 ΣΕ ΣΥΜΦΩΝΙΑ ΜΕ ΤΟΝ ΚΑΝΟΝΑ EN 60.598
 بموافقه إنفاق نظام EN 60.598

RECOMMENDED FOR INSTALLATIONS
 WHERE THE PROFILE CAN BE INSTALLED
 BEFORE THE FALSE PLASTERBOARD
 CEILING (THICKNESS 12,5mm)



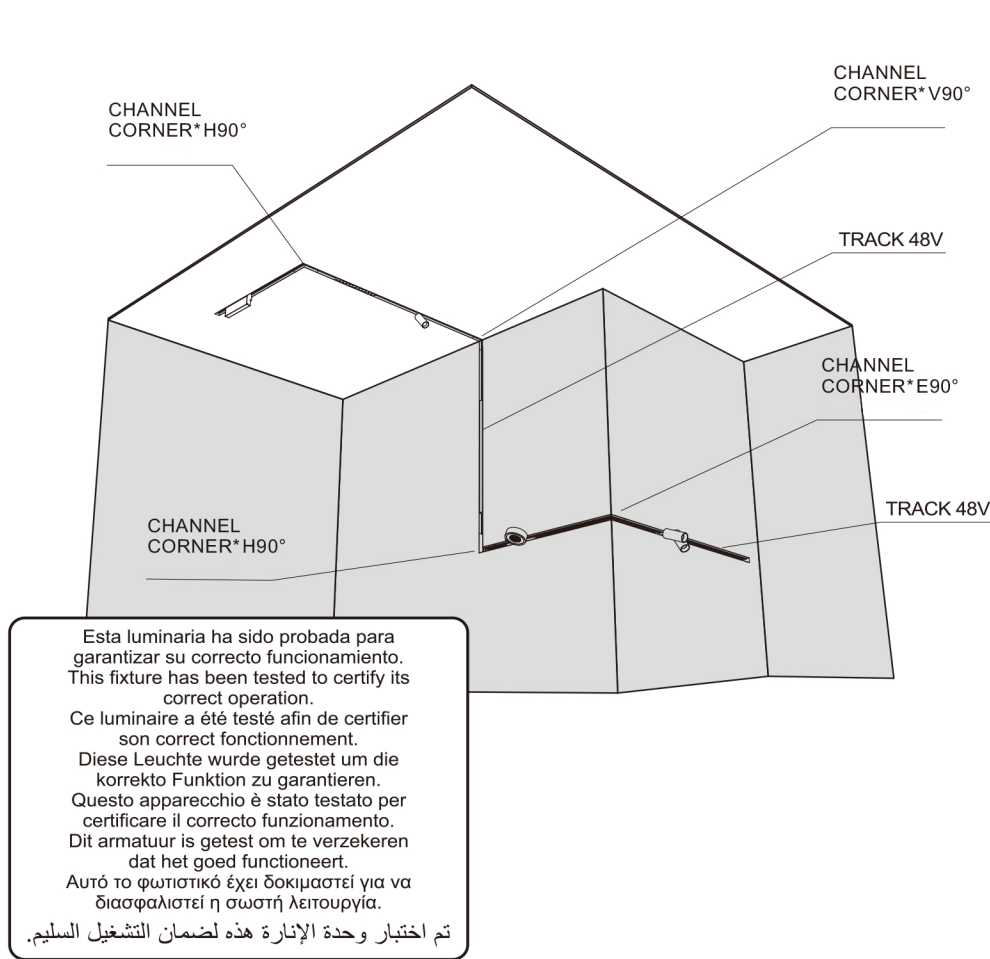



Framtida

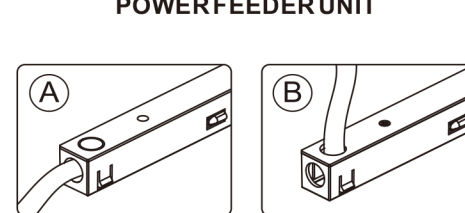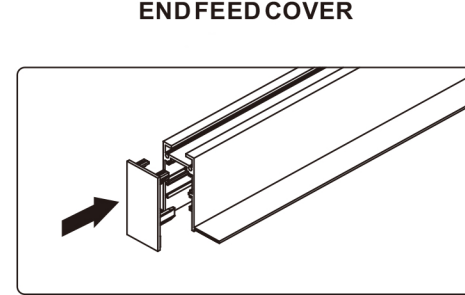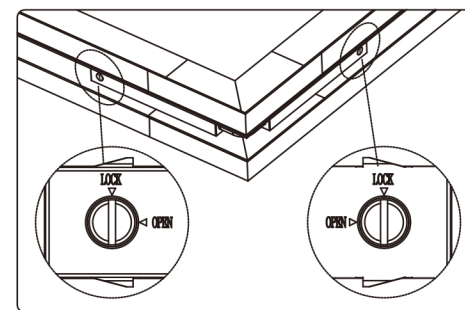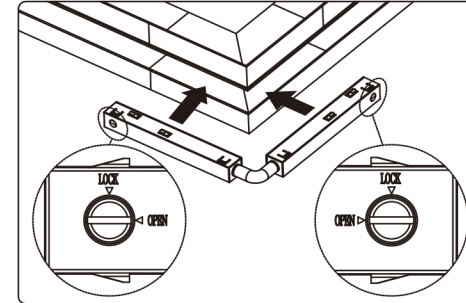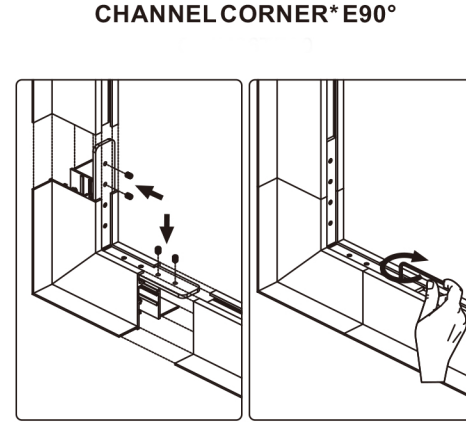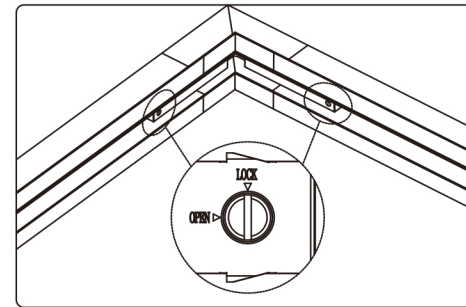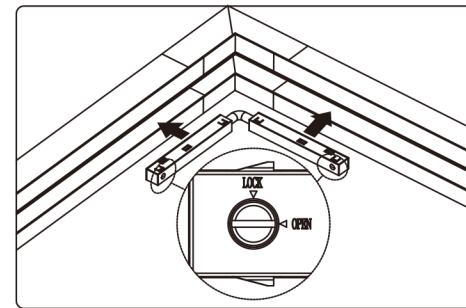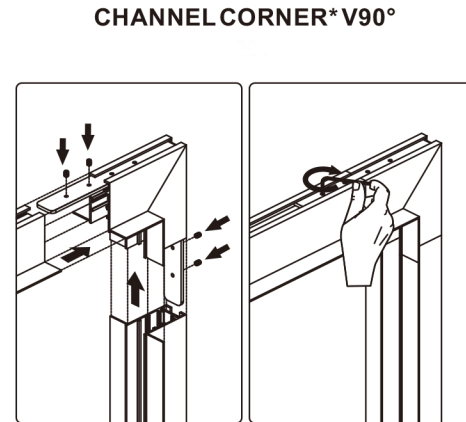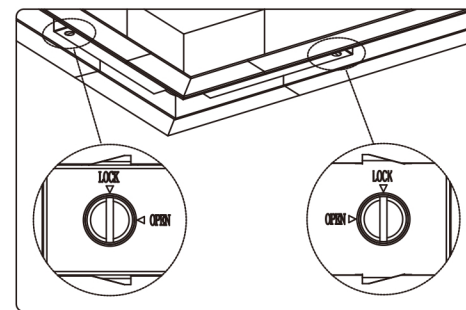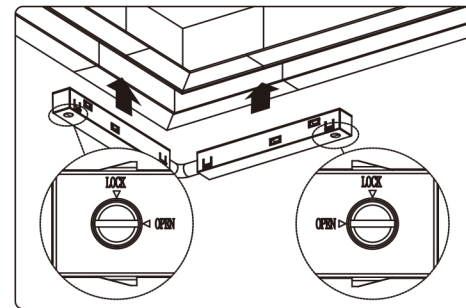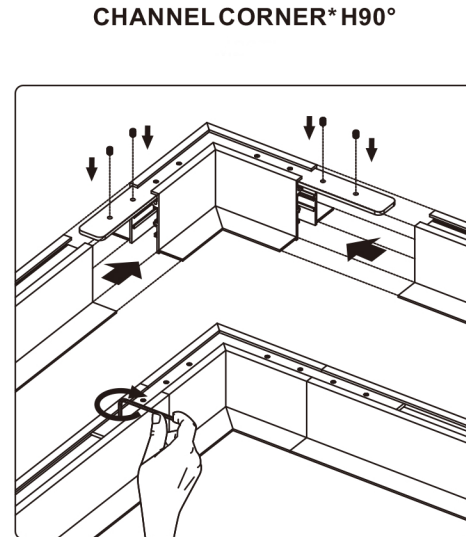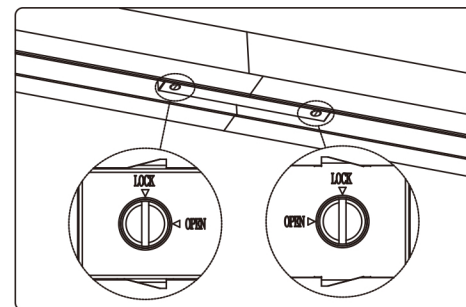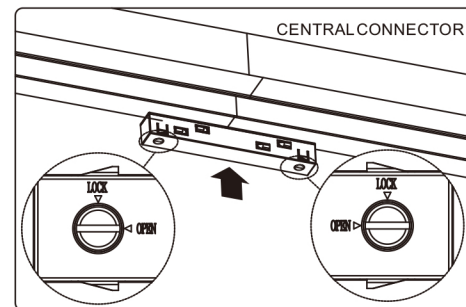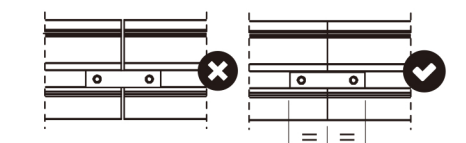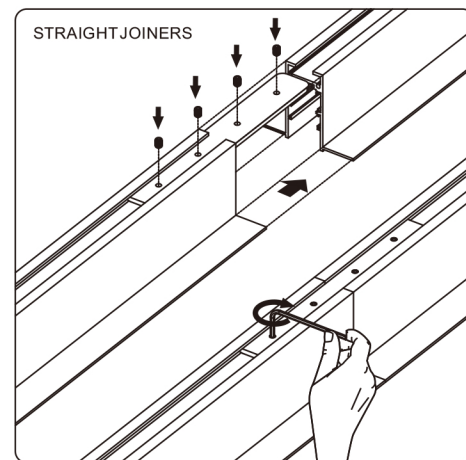






CABLE SECTION AND LENGTH
BETWEEN TRACK AND POWER SUPPLY

TRACK LENGTH (m)		10			20			29
CABLE LENGTH (m)		1	10	20	1	10	20	1
P(W)	CABLE SECTION (mm²)							
75	0,75	✓	✓	✓	✓	✓	✗	✓
	1,5	✓	✓	✓	✓	✓	✗	✓
150	0,75	✓	✗	✗	✓	✗	✗	✓
	1,5	✓	✓	✗	✓	✓	✗	✓



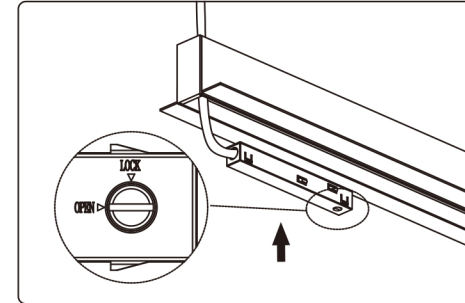
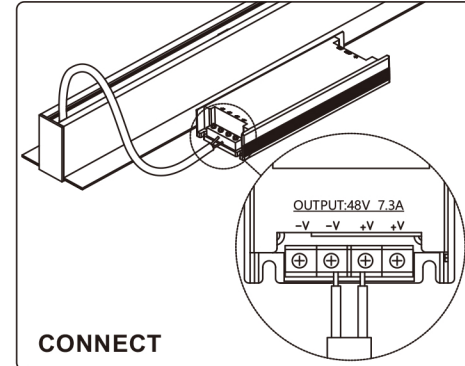
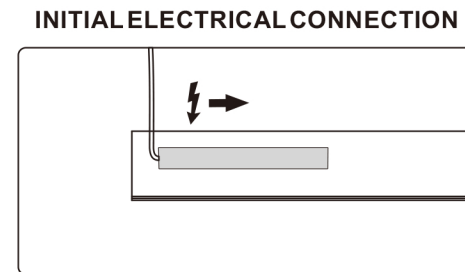


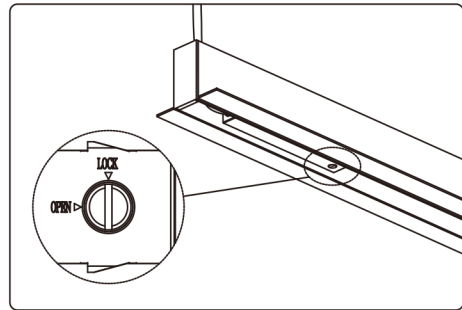

INTERMEDIATE POWER INPUT

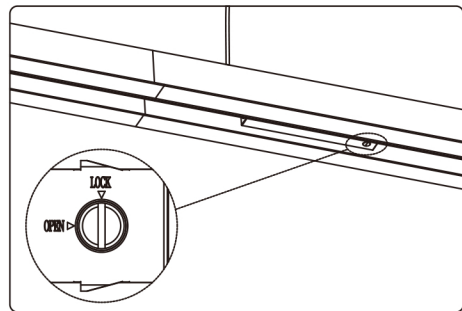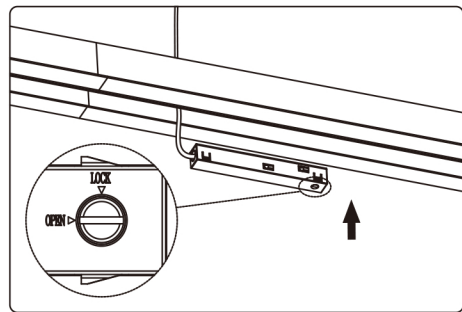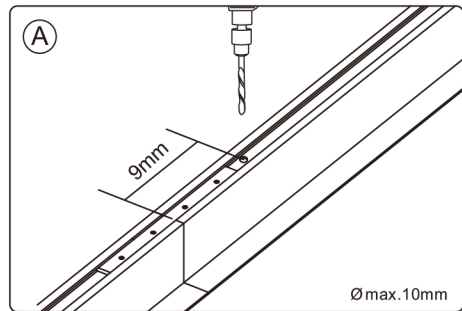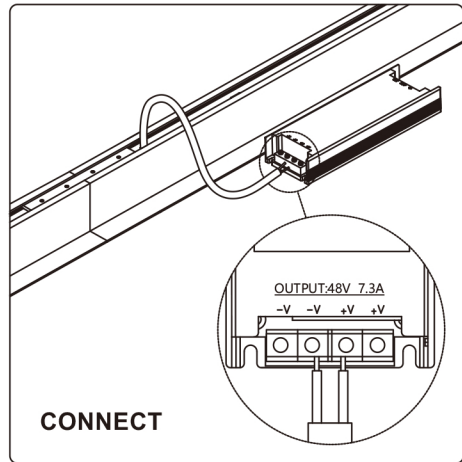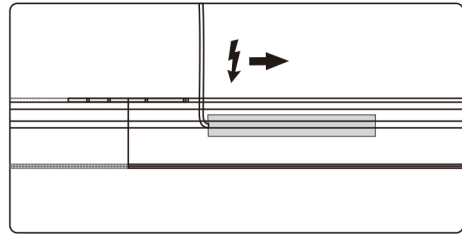

ELECTRICAL CONNECTION
POWER SUPPLY

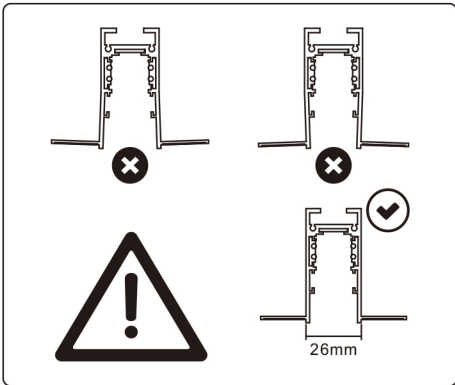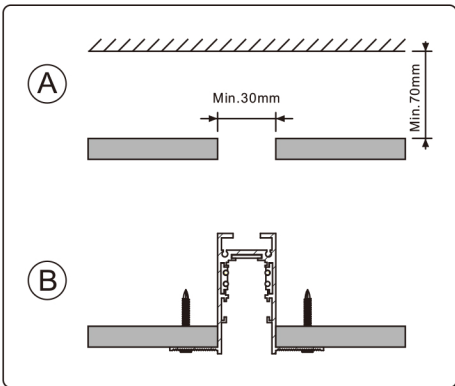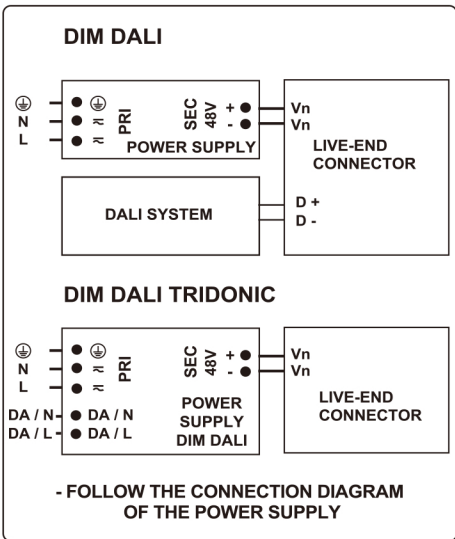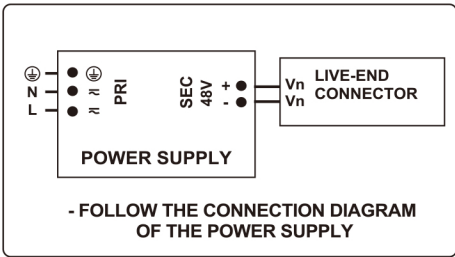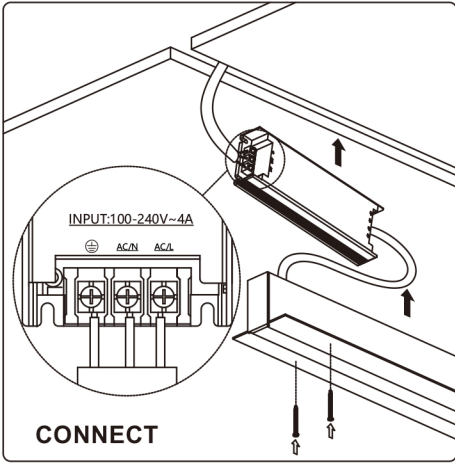

PLASTERBOARD

